
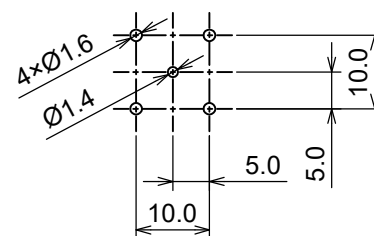


RoHS10 Support

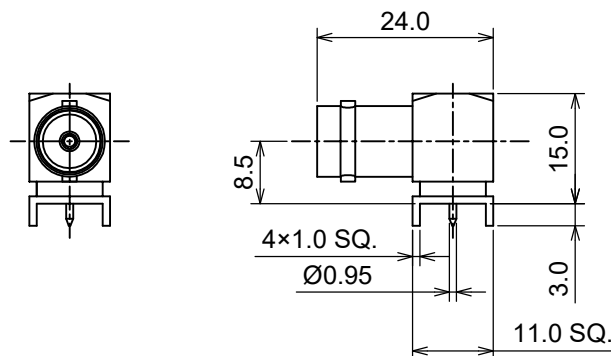

○規格 (Standard)
MIL-C-3608

○仕様 (Specification)

特性インピーダンス (Impedance) : $50\ \Omega$
 定格周波数 (Working Frequency Range) : DC~4GHz
 電圧定在波比 (VSWR) : ≤ 1.25 at 4GHz
 挿入損失 (Insertion Loss) : 0.1dB
 定格電圧 (Voltage Rating) : 500V rms
 耐電圧 (Proof Voltage) : 1500V rms
 接触抵抗 (Contact Resistance) : $2\text{m}\Omega$ max
 絶縁抵抗 (Insulation Resistance) : $\geq 5000\text{M}\Omega$
 勘合保証回数 (Connector Life) : 500 times min

3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE			Unit	日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ± 0.10	.X ± 0.15			
DIAMETER	.X ± 0.10				
Approved	Checked	Drawn		NAME	REV
エレパーツ '20.06.01 池尾	エレパーツ '20.06.01 大江	エレパーツ '20.06.01 山崎	mm		
			A4	BNC-LRPC-1	1