


RoHS10 Support

REACH Support

CFSI Support

IP67 Waterproof after mating (Before the panel)

○形状 (SHAPE)

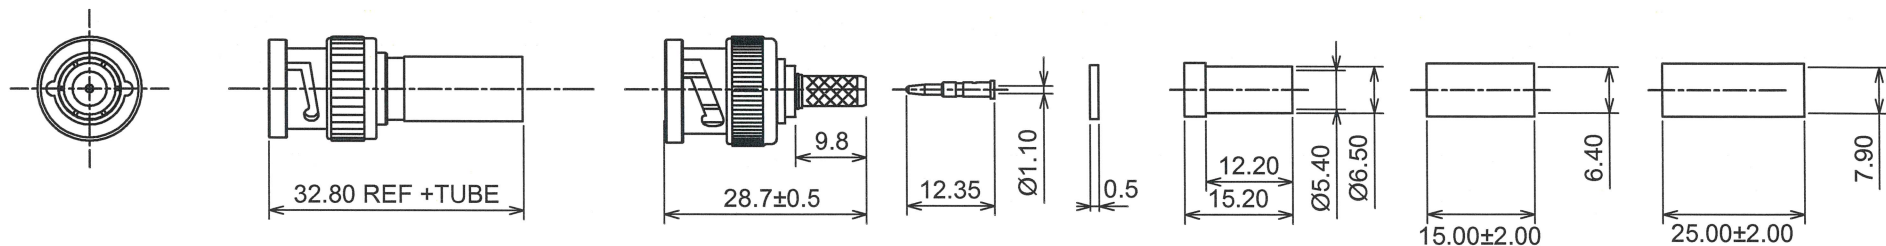

○規格 (Standard)



JIS-C-5412 MIL-C-3608 MIL-C-39012

○仕様 (Specification)

- 特性インピーダンス (Impedance) : 50Ω
- 定格周波数 (Working Frequency Range) : DC~6GHz
- 電圧定在波比 (VSWR) : ≤1.50 at 6GHz
- 定格電圧 (Voltage Rating) : 500V rms
- 耐電圧 (Proof Voltage) : 1000V rms
- 接触抵抗 (Contact Resistance) : 3mΩ max
- 絶縁抵抗 (Insulation Resistance) : ≥5000MΩ
- 勤合保証回数 (Connector Life) : 500 times min

○加工寸法 (ASSEMBLY)

SUGGESTED STRIPPING INSTRUCTIONS RECOMMENDED CLIPPING TOOL SIZE



RECOMMENDED CRIMP HEIGHT 5.61±0.15

10	TUBE	EVA	NATURE
9	O-RING	S·RUBBER	NATURE
8	GASKET	S·RUBBER	NATURE
7	SPRING	STEEL	NICKEL
6	FERRULE	BRASS	NICKEL
5	BODY	BRASS	NICKEL
4	INSULATAR	PTFE	NATURE
3	CONTACT	BRASS	GOLD
2	INSULATAR	PTFE	NATURE
1	SHELL	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH



TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
			A4	N A M E	BNC-PSB-3D
				REV	1