


RoHS10 Support

REACH Support

CFSI Support

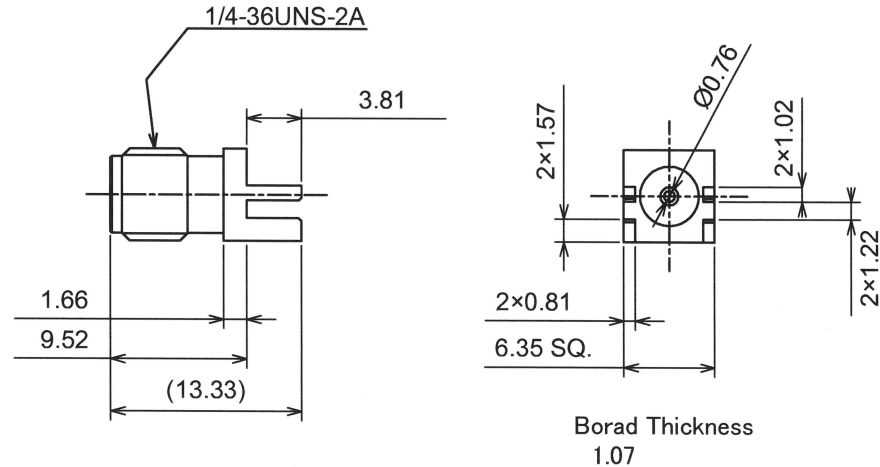

○規格 (Standard)
MIL-C-39012

○仕様 (Specification)

- 特性インピーダンス (Impedance): 50 Ω
- 定格周波数 (Working Frequency Range): DC~18GHz
- 電圧定在波比 (VSWR): ≤ 1.35 at 18GHz
- 挿入損失 (Insertion Loss): 0.04dB max × √f GHz (f:Frequency)
- 定格電圧 (Voltage Rating): 170V rms
- 耐電圧 (Proof Voltage): 500V rms
- 接触抵抗 (Contact Resistance): 6mΩ max
- 絶縁抵抗 (Insulation Resistance): ≥ 5000MΩ
- 勤合保証回数 (Connector Life): 500 times min
- 使用温度範囲 (Temperature range): -50°C~150°C
- 推奨締め付けトルク (Recommended Torque) 0.8~1.1 Nm



TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
DECIMALS	.XX ±0.10	.X ±0.15			
DIAMETER	.X ±0.10				
Approved	Checked	Drawn	Unit	SMA-PC-AU (SMA-RS-EGMT-1.07-Au)	
 '22.03.01 山崎	 '22.03.01 大江	 '22.03.01 大江	mm		
			A4	NAME	REV
					2

3	Contact	BeCu	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	GOLD
No	DESCRIPTION	MATERIAL	FINISH