


RoHS10 Support

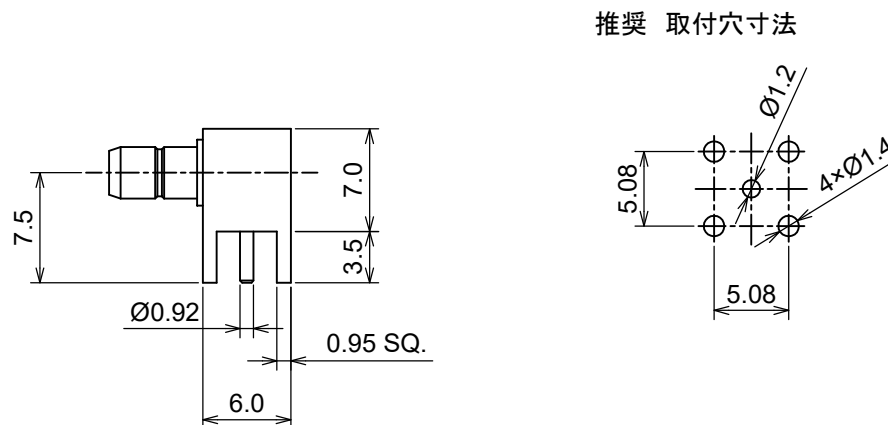

○規格 (Standard)
JIS-C-5415

○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω
 定格周波数 (Working Frequency Range) : DC~4GHz
 電圧定在波比 (VSWR) : ≤ 1.35 at 4GHz
 挿入損失 (Insertion Loss) : 0.5dB
 定格電圧 (Voltage Rating) : 335V rms
 耐電圧 (Proof Voltage) : 750V rms
 接触抵抗 (Contact Resistance) : Inner 6.0/Outer 1.0 mΩ max
 絶縁抵抗 (Insulation Resistance) : ≥ 1000M Ω
 適合保証回数 (Connector Life) : 500 times min

3	Contact	BRASS	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD	
Approved	Checked	Drawn			
 '20.06.01 池尾	 '20.06.01 大江	 '20.06.01 山崎	A4	N A M E	SMB-RL-05-LOW REV 1