



RoHS10 Support

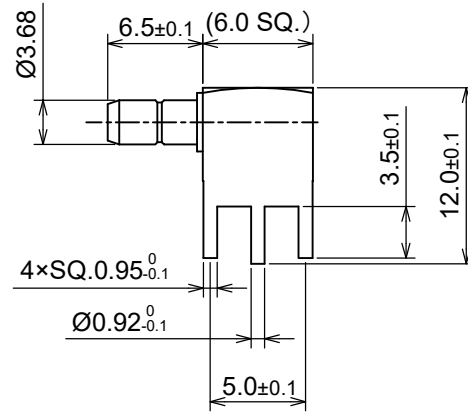

取り付け穴参考寸法

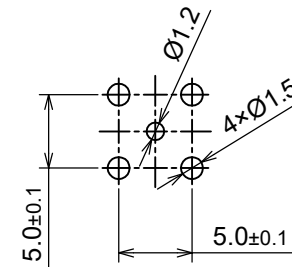

○規格 (Standard)
JIS-C-5415

○仕様 (Specification)

- 特性インピーダンス (Impedance) : 50 Ω
- 定格周波数 (Working Frequency Range) : DC~4GHz
- 電圧定在波比 (VSWR) : ≤1.35 at 4GHz
- 挿入損失 (Insertion Loss) : 0.5dB
- 定格電圧 (Voltage Rating) : 335V rms
- 耐電圧 (Proof Voltage) : 750V rms
- 接触抵抗 (Contact Resistance) : Inner 6.0/Outer 1.0 mΩ max
- 絶縁抵抗 (Insulation Resistance) : ≥1000MΩ
- 勘合保証回数 (Connector Life) : 500 times min

| | | | |
|----|-------------|----------|--------|
| 3 | Contact | BRASS | GOLD |
| 2 | Dielectric | PTFE | NONE |
| 1 | Body | BRASS | NICKEL |
| No | DESCRIPTION | MATERIAL | FINISH |

| | | | | | |
|---|------------------------------|------------------------------|----|---------------------------------------|-----------------------|
| TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10 | | | | 日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD | |
| Approved | Checked | Drawn | | | |
| エレパーツ '20.06.01 池尾 | エレパーツ '20.06.01 大江 | エレパーツ '20.06.01 山崎 | A4 | N A M E | SMB-RL-05 REV 1 |